


LUXOMAT® CdS-SM



Double cable inlet



Base for mast installation (incl.)

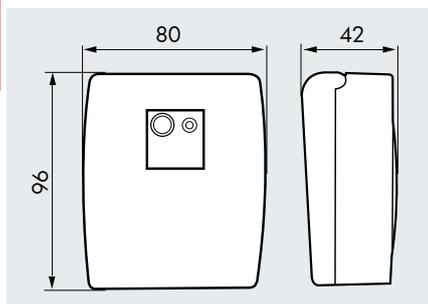

TECHNICAL DATA

- 230V~ ±10%
- IP54 / Class II / CE
- L 42 x W 80 x H 96 mm
- 25°C to +50°C
- made of high-quality and UV-resistant polycarbonate
- Channel 1 (light control)**
- 2300 W, cosφ = 1
1150 W, cosφ = 0.5
- Activation and deactivation delay:** 1 - 120 sec.
- 1 - 1000 Lux

PRODUCT INFORMATION

- LUXOMAT® CdS-SM photocell for automatically switching lighting
- Light value and activation/deactivation delay may be set from the outside using the potentiometer
- LED setting aid (no delay)
- Activation and deactivation delay with self-learning deactivation-light value
- Integrated automatic function (10 Lux / 40sec. activation / 120sec. deactivation delay)
- Double cable inlet from underneath possible
- Large terminal compartment
- Wall and mast installation
- Clip for closing the housing
- **Application examples:** ideal for entrance areas, staircases, halls where permanent light is required

Description	Colour	Part number
CdS-SM	white	92369