

LUXOMAT® IR-PD4-TRIO-DALI




TECHNICAL DATA

- Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
- clouded or dark:** 5 to 6 m;
- sunshine:** 2 to 3 m
- L 80 x W 60 x H 8 mm

PRODUCT INFORMATION

- Using the LUXOMAT® IR-PD4-TRIO-DALI infrared remote control, all settings at the LUXOMAT® PD4-M-TRIO-DALI can be made comfortably from the ground without having the annoyance of setting up ladders.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional functions such as dimming to the desired target luminosity value for channel 1 and 2 or the useful 2 s test function are supported with the IR-PD4-TRIO-DALI which is available as an option.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).

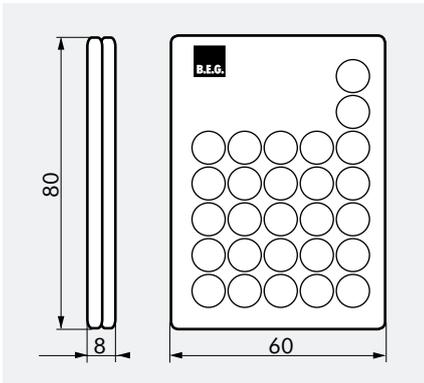

PROGRAM FUNCTIONS

		Programmable Opening and closing – also with parental lock and security against sabotage after setting up		Follow-up time orientation light: - 1 min. to 60 min.
		Test operation - The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.		Orientation light 10 - 30% of nominal light
		Sun button – preselected light value (daylight operation)		LED-Button - Activate and deactivate the walking test LED
		Target luminosity values for constant light control - 1000, 750, 500, 300, 150, 100 Lux		100h function
		Dimming of target luminosity value (for channel 1 and 2 only)		Change between operation modes semiautomatic / automatic (for DA 1 and 2 only)
		Save dimmed target luminosity value		DA 1/2 ON/OFF in closed state without sabotage protection
		Follow-up time light - 10 min., 15 min., 30 min., 45 min., 60 min.		Reset - Enable potentiometer - Exit all timers, switch off channels
		Orientation light ON/OFF		Permanent tamper protection - Permanent inhibition of the detector; all functions of the remote control are blocked, hardware reset by DIP3 to leave mode

Description

LUXOMAT® IR-PD4-TRIO-DALI

Colour

grey

Part number

92104