


PD2-KNX-SM/-FC/-FM


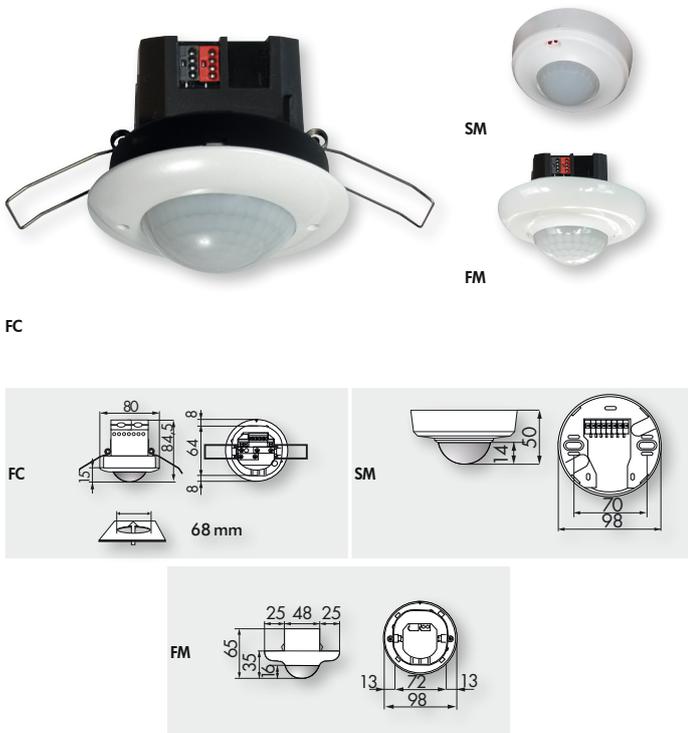


■ TECHNICAL DATA

- 24 V DC from KNX-BUS network
- 10mA
- 360°
- Ø 10 m across
- Ø 6 m towards
- Ø 4 m seated
- SM= IP20 FC= IP20 FM= IP20 / Class II
- 25 °C to +55 °C
- Housing UV- and shock resistant polycarbonate
- IR-PD-KNX

PRODUCT INFORMATION

- KNX occupancy detector with integrated KNX bus connector
- When using the application **B.E.G.**_Occupancy detector_928XX_V5.0, several operation modes are available:
 1. Automatic or semi-automatic mode with daylight-depending constant light control or switching output
 2. Slave mode
- Up to three additional switching channels – selectively either daylight-depending or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Up to three additional switching channels – selectively either daylight-depending or not
- Threshold values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- Burn-in function with adjustable burn-in time from 1 to 100 hours
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

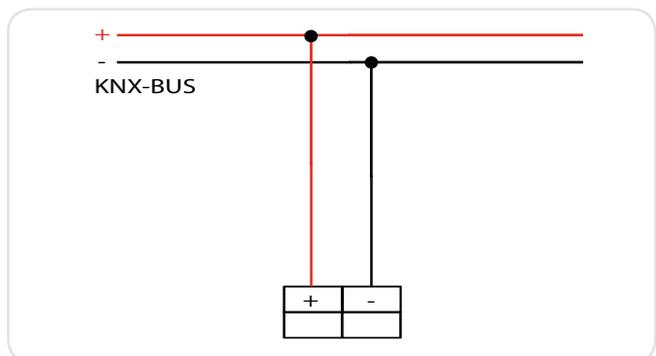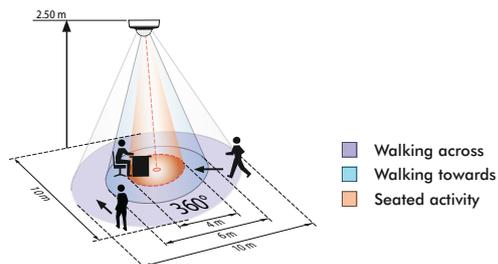

Description	Colour	Part number
PD2-KNX-FC	white	92881
PD2-KNX-FM	white	92882
PD2-KNX-SM	white	92880
Accessory (optional)		
IR-PD-KNX	grey	92123
Wire basket BSK (Ø 200 x 100)	white	92199
Socket IP54 for PD2- and PD4-SM	white	92161