


LUXOMAT® PD11-KNX-FLAT-FC



FC

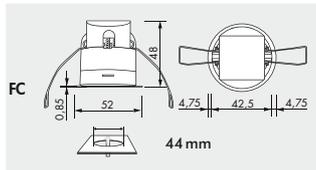



FC

PRODUCT INFORMATION

- Low profile KNX occupancy detector with integrated KNX bus connector
- Up to three additional switching channels – selectively either daylight-dependent or not
- Threshold values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

■ TECHNICAL DATA

- 24 V DC from KNX-BUS network
- 360°
- Ø 9 m across
Ø 6 m towards
Ø 3 m seated
- IP FC= IP20 / Class II
- 25 °C to +55 °C
- Housing UV- and shock resistant polycarbonate
- IR-PD-KNX
- For integration in KNX-BUS systems**

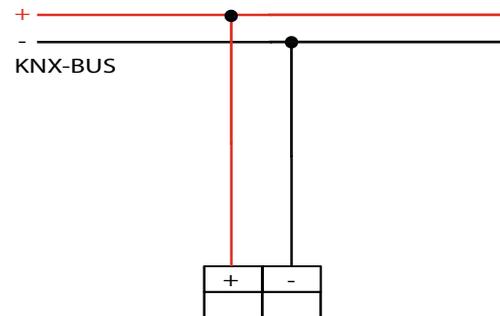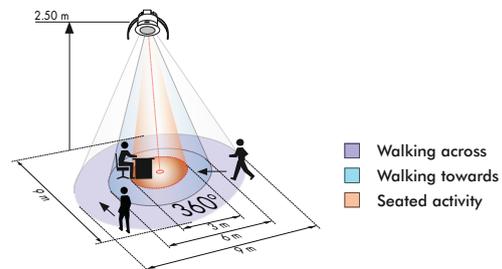

Description	Colour	Part number
PD11-KNX-FLAT-FC	white	92893
Accessory (optional)		
IR-PD-KNX	grey	92123
Cover ring (included)	black	92537
Cover ring	different colours	on request