


## RC-plus next 230 KNX



white


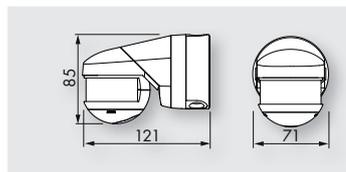


### **i** PRODUCT INFORMATION

- KNX motion detector with integrated KNX bus connector
- When using the application **B.E.G. Occupancy detector\_928XX\_V5.0**, several operation modes are available:
  1. Automatic or semi-automatic mode with daylight-depending constant light control or switching output
  2. Slave mode
- Up to three additional switching channels – selectively either daylight-depending or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Threshold values and follow-up times can be changed for all channels using communication objects
- Up to three additional switching channels – selectively either daylight-depending or not
- Burn-in function with adjustable burn-in time from 1 to 100 hours
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

### ■ TECHNICAL DATA

- 24 V DC from KNX-BUS network
- 7mA
- 230°
- max. 20 m when walking across (tangential)
- IP54 / Class II
- 25 °C to +55 °C
- Housing UV- and shock resistant polycarbonate
- IR-PD-KNX

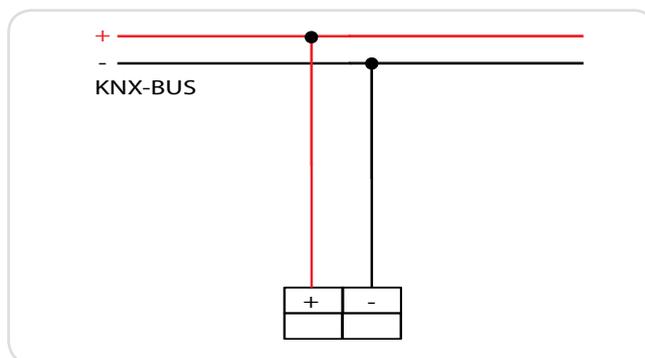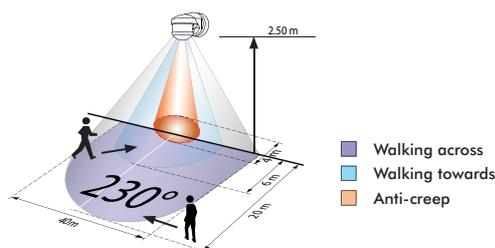

| Description                            | Colour       | Part number  |
|--|--------------|--------------|
| RC-plus next 230 KNX                   | white        | 92894        |
| RC-plus next 230 KNX                   | black        | 92895        |
| <b>Accessory (optional)</b>            |              |              |
| IR-PD-KNX                              | grey         | 92123        |
| Outside corner socket for RC-plus next | white/ black | 97004/ 97024 |
| Inside corner socket for RC-plus next  | white        | 97005        |
| Wire basket BSK (Ø 164 x 143)          | white        | 92467        |