

LUXOMAT® IR-PD-DUO




TECHNICAL DATA

- Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
- clouded or dark:** 5 to 6 m;
- sunshine:** 2 to 3 m
- L 80 x W 60 x H 8 mm

PRODUCT INFORMATION

- Using the LUXOMAT® IR-PD-DUO infra-red remote control, all settings at the LUXOMAT® PD4-M-DUO can be made comfortably from the ground without having the annoyance of setting up ladders.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-PD-DUO.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).

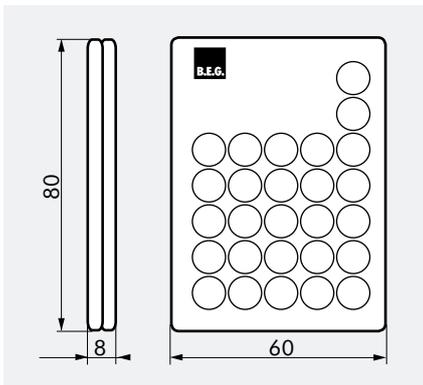

PROGRAM FUNCTIONS

		Programmable Opening and closing – also with parental lock and security against sabotage after setting up		Preselected switch on times for the lighting: - 5 min. to 30 min.
		Test operation - The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.		Change between operation modes semiautomatic / automatic
		Mode measuring of the daylight or measuring of daylight and artificial light (mixed light)		Reset - Resetting of all functions
		12 preselected light values for the switch on value of the lighting - 1000, 900, 800, 700, 600, 500, 400, 300, 200, 100, 50 and 20Lux		Manual switch on and off of the connected lighting and choose of the channel for the light value default
		Automatic reading and saving of the actual light level		Determination of the switch on threshold to attain a calculatory target value
		Permanent tamper protection - Permanent inhibition of the detector; only ON- and OFF function on the remote control possible.		

Description	Colour	Part number
LUXOMAT® IR-PD-DUO	grey	92092