
## B.E.G. LUXOMAT®

## PD2-M-DALI/DSI-SM/-FC



FC 80



## (i) PRODUCT INFORMATION

- Occupancy detector for daylight-dependent lighting control
- DALI/DSI interface for control of digital dimmable electronic ballasts as a group
- Can be switched between DALI and DSI modes with remote control and Dip switches.
- Installation as Master
- Additional functions can be set via optional remote control
- Push button manual switching and dimming available
- Detection area can be extended with Slave units

## **■ TECHNICAL DATA**

110-240 V AC , 50 / 60 Hz

. 3

360°

Ø 10 m across

Ø 6 m towards

Ø 4 m seated

SM= IP20 FC= IP20 / Class II

l

-25 °C to +50 °C

Ш

Housing UV- and shock resistant polycarbonate IR-PD-DALI, IR-PD-DALI-Mini, IR-PD-DALI-E,

IR-PD-DALI-LD

Channel 1 (control the lighting)


DALI


max. 50 DALI/DSI EB's

1 - 30 min

(X

10 - 2000 Lux



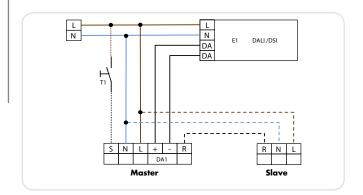

Description	Colour	Part number
PD2-M-DALI/DSI-FC	white	92258
PD2-M-DALI/DSI-SM	white	92280
Accessory (optional)		
IR-PD-DALI	grey	92094
IR-PD-DALI-Mini	grey	92112
Wire basket BSK (Ø 200 x 100)	white	92199
Socket IP54 for PD2- and PD4-SM	white	92161